


API 610 11th ed. Vertical Process Pump(VS1)

TVP Series

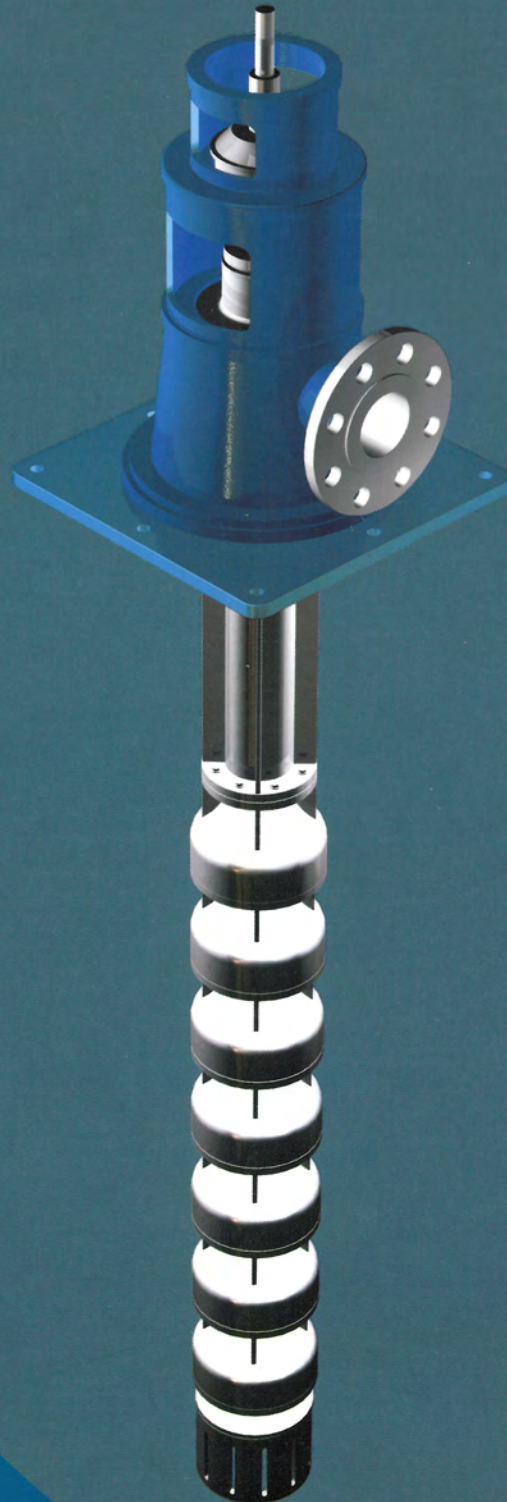

API 610 11th ed. Vertical Process Pump(VS1)

TRUFLO

TVP SERIES

API 610 11th ed. Vertical Process Pump(VS1)

- Max.Capacity :
14000m³/h (61600GPM)
- Max.Head : 280m (920ft)
- Temperature : 200°C (392°F)
- Allowed Pressure :
30kg/cm² (430psi)
- Power : 2000kw (2680HP)
- Material : DCI, WCB, CF8, CF8M, CF3,
CN7M, CD4M
- Fabricated discharge head and flanged column.
- Flanged bowl construction.
- Alloy construction for corrosive /
abrasive services.

The TRUFLO TVP is multistage, heavy-duty single casing vertical turbine pump designed to meet API 610(VS1).


It is available with either radial or mixed flow hydraulics to fulfill the application requirements.

The TVP is designed to operate in high pressure and temperature condition. This pump covers a wide range of hydraulic conditions to meet virtually every pumping service in the industry with optimum efficiency.

The simple construction of TRUFLO VS1 Pump offers ease of maintenance and installation.

APPLICATION

- _ Refinery
- _ Chemical and petrochemical industries
- _ Liquefied gas
- _ Pipeline and transfer service
- _ Condensate service
- _ Offshore crude oil loading
- _ Lube oil
- _ Condensate extraction
- _ Seawater lift
- _ Stormwater and drainwater services
- _ Recovered oil
- _ Tank service

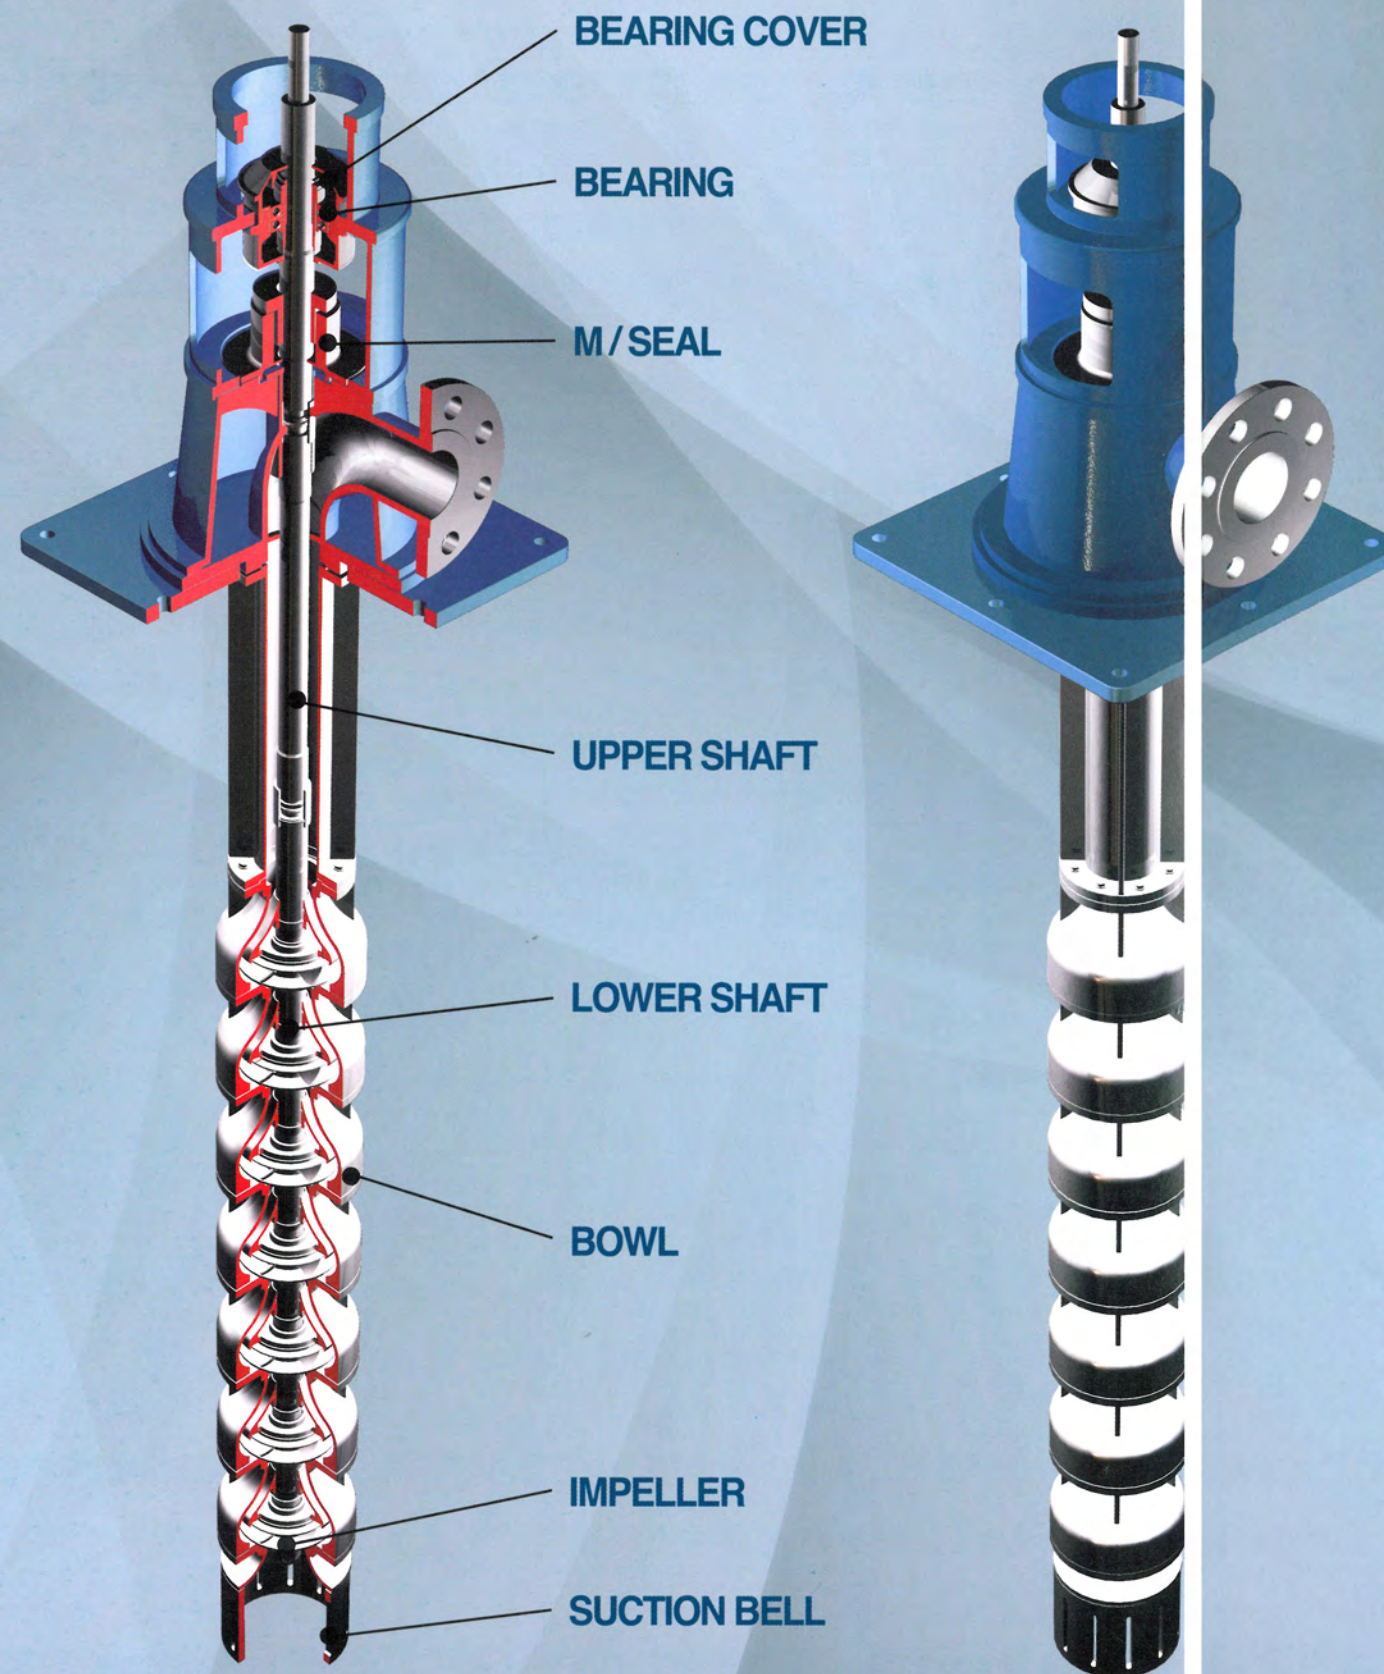

Suction Bell

Allows smooth entry of liquid into impeller eye, minimizes vortex formation.

Suction Bell Bearing

Provided for shaft stability.

Sand Collar

Prevents solids from entering suction bearing.

Impeller

Semi-open or enclosed for appropriate service.

Taper Lock

Alloy steel for fastening impellers on 17" and smaller sizes.

Keyed

Impeller fastened onto the shaft by keyed split ring.

Pump Shaft

Available in 316SS, 316L, 420J2, 17-4 PH, Monel and other alloys for strength and corrosion resistance.

Diffuser Bowl

Available in variety of cast materials. Glass lined cast iron standard through 18" sizes.

Stages

Flanged and bolted together for ease of maintenance.

Sleeve Type Bearing

Provided at each stage to assure stable operation away from critical speed.


Flanged Bowls

Registered fits assure positive alignment, ease of maintenance.


API 610 11th ed. **Vertical Pump (VS1)**

PUMP SELECTION GUIDE


FAMILY CURVE FOR TVP 3600 RPM
CAPACITY - GPM

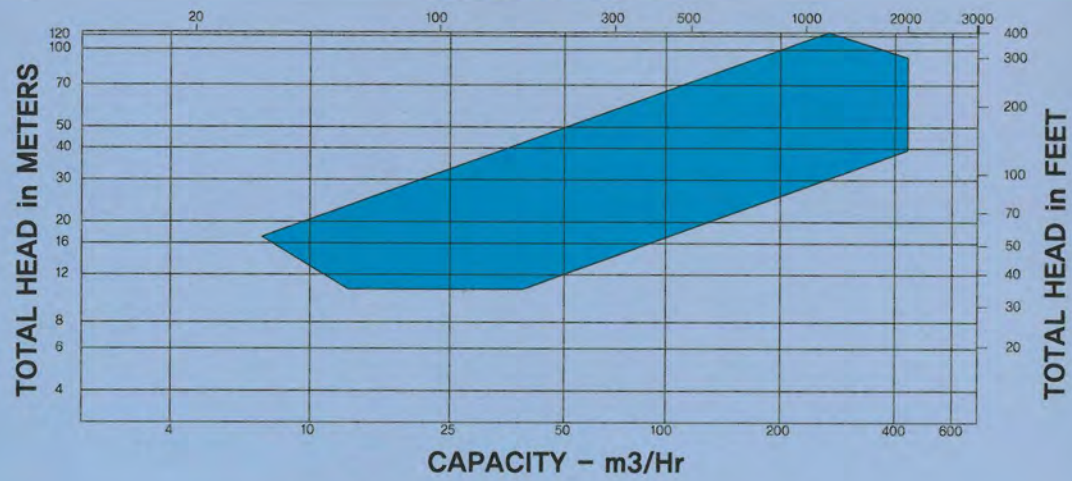


FAMILY CURVE FOR TVP 1800 RPM
CAPACITY - GPM

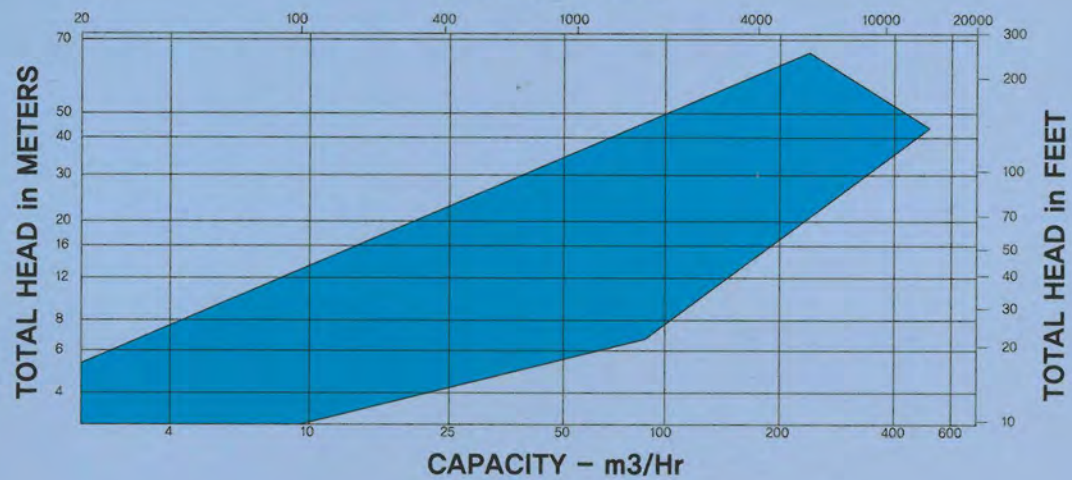

FAMILY CURVE FOR TVP 1200 RPM
CAPACITY - GPM

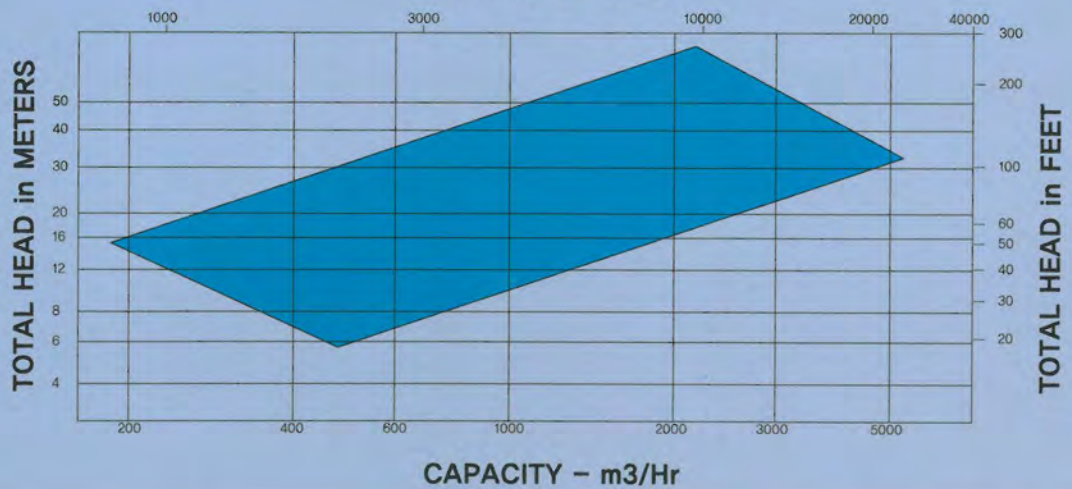

SECTIONAL

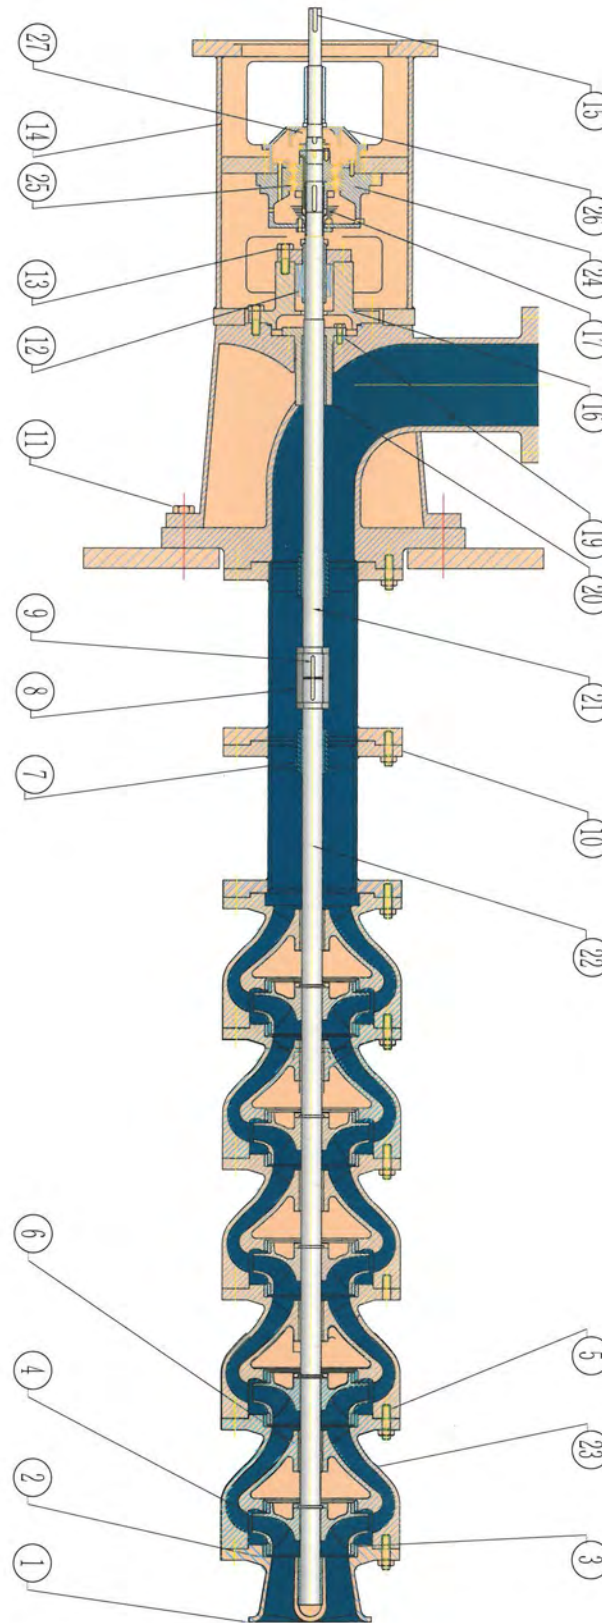

NO.	PART NAME
27	SLEEVE NUT
26	BEARING COVER
25	BEARING
24	BEARING HOUSING
23	BOLT/NUT
22	LOWER SHAFT
21	UPPER SHAFT
20	PRESS.REDUCING BUSH
19	BOLT/NUT
18	S/B GASKET
17	BEARING SLEEVE
16	STUFFING BOX
15	SHAFT KEY
14	MOTOR ADAPTOR
13	M/C SEAL BLAND
12	M/C SEAL
11	BOLT/NUT
10	BEARING RETAINER
9	COUPLING KEY
8	LINE SHAFT COUPLING
7	LINE SHAFT BEARING
6	BOWL BUSH
5	BOWL
4	IMPELLER
3	IMPELLER WEARING
2	CASING WEARING
1	SUCTION BELL
NO.	PART NAME

Truflo Pumps, Inc.

7105 Cessna Drive
Greensboro, NC 27409
Phone: (800) 789-1864
Fax: (336) 664-1353
www.truflo.com

* Contents in this leaflet are subject to change without prior notice.